
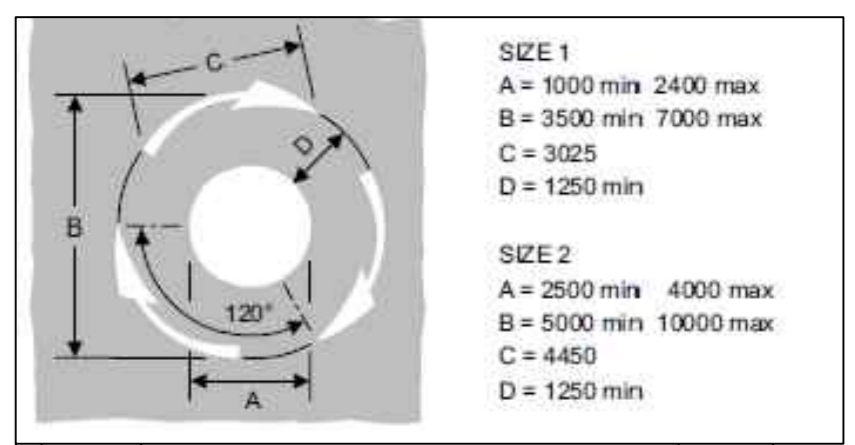


Notes:
 Speed Cushion construction Detail:
 Precast Concrete style, 1900mm long, red in colour
 Maintain a minimum 700mm gap from edge of kerb, max 900mm gap
 Gap between speed humps can vary must not be less than 600mm
 Width of speed cushion: 1900mm

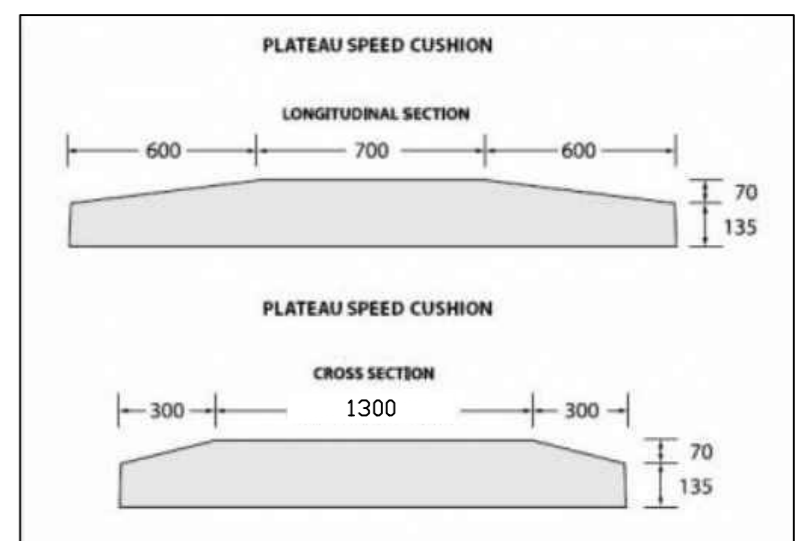

Sizes of on site mini roundabout features:
 A = 4000mm
 B = 6000mm
 C = 3025mm
 D = 1000mm

Existing lining to be burned off where changes to the lining have been identified.

Locations of lining, mini-roundabouts and speed cushions will be marked out on site by engineer prior to install.

Rev:	Date:	Revisions	Checked Date:	Appvd Date:
South Lanarkshire Council, Community and Enterprise Resources				
Scale :	GM	Date :	June 2020	
Drawn by :	GM	Checked by :	NB	
Drawing Status:	Consultation	Approved by :	SL	
Head of Roads and Transportation Gordon Mackay B.Sc., C.Eng., M.I.C.E.				
Design Office: 154 Montrose Crescent, Hamilton ML3 6LB				
Abercorn Dr / Chestnut Cres Traffic Management Proposals Consultation				
Drawing No: TE/TT/Consultation/001				
Rev:				
File No:				
Original Drawing Size 594 * 420 (A2)				